


Star® TSP 847

Receipt Thermal Printer

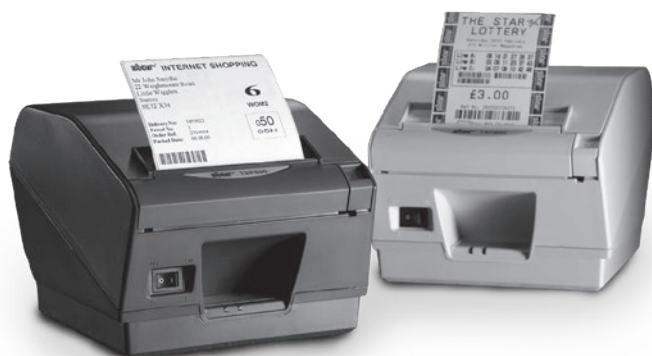

Standard Features

- Direct thermal
- Small desktop footprint
- Jam-proof patented cutter with full or partial cut
- Wide area printing
- Zoom raster drive allows letter-sized documents to be printed in 4.4 format
- Logo storage capability

Specifications

Print Speed:

1,200 dots per second (150 mm/sec)

Paper Width:

Max 104 mm

Resolution:

203 dpi

Bar Codes:

Code 39, Interleaved 2 of 5, JAN/EAN/UPC, Code 128, Code 93, Coderbar, GS1-128

Emulation:

Star, DP8340

Roll Paper:

Paper width: 111.5 mm (4.4 in)

Thickness: 65 to 150

Diameter: 4 in

Drivers:

Windows® 9X, 2000, XP, Linux, OPOS, JPOS, Mac OSX™

Interface:

RS-232 serial (DB-25F)

Operating Temperature:

41 °F to 113 °F (5 °C to 45 °C)

Dimensions:

(W × D × H)
7 × 8.4 × 5.8 in
(180 × 213 × 148 mm)

Weight:

5 lb

Approvals:

RoHS compliant

Warranty:

Three-year limited

Part Number/Price

Part #	Description	Est. Weight	Price
107617	TSP847D-24 line receipt printer (requires power supply)	5 lb	Consult

Options/Accessories

Part #	Description	Price
69903	Power supply, PS-60-24A	Consult
72309	Power supply, 12 VDC with car adaptor	Consult
107618	Thermal paper 4.4 in wide, 4 in OD	Consult
Cables		
15547	Blunt-end 25-pin D-sub male RS-232	Consult
15568	25-pin D-sub male to 25 pin D-sub male RS-232 serial interface cable (Rice Lake indicators)	Consult
72440	25-pin male to nine-pin female	Consult