

S-BEAM 60063

Stainless Steel, Welded Seal, NTEP Certified 1:5,000 Class III, 1:10,000 Class IIIL Single Cell, IP68



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
500 lb	36272	3 lb	Consult
750 lb	36273	3 lb	Consult
1,000 lb	36274	3 lb	Consult
1,500 lb	36275	3 lb	Consult
2,000 lb	36276	3 lb	Consult
2,500 lb	36277	3 lb	Consult
3,000 lb	36278	3 lb	Consult
5,000 lb	36279	4 lb	Consult
Non-NTEP Certified			
10,000 lb	36280	4 lb	Consult

Dimensions

Rated Capacity	A	B	D	E
lb/in				
500 to 3,000	1/2-20 UNF	1.00	2.00	3.00
5,000 to 10,000	3/4-16 UNF	1.00	3.50	4.75

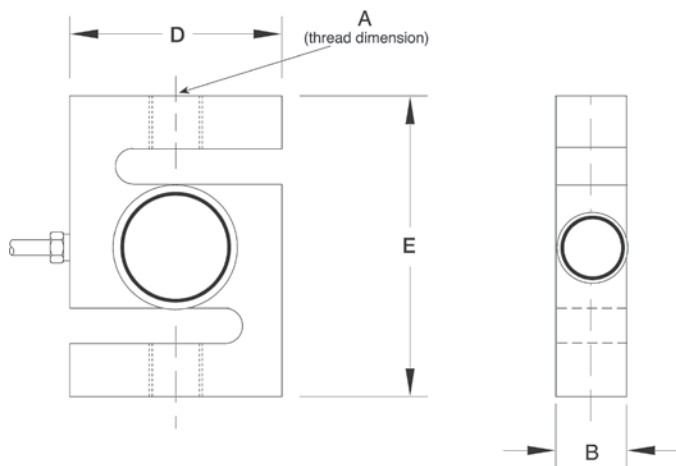

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL20001HE..... page 96

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
ITCM Isolated Tension Cell Mount..... page 28

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

349 to 355 ohm

Input Resistance:

349 to 350 ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 V DC (15 V maximum)

Combined Error:

0.03% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Diameter:

0.200 in
polyurethane jacket

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Warranty:

One-year limited

Approvals:

cFMus
NTEP