




Picture is a representation of actual product

Approvals

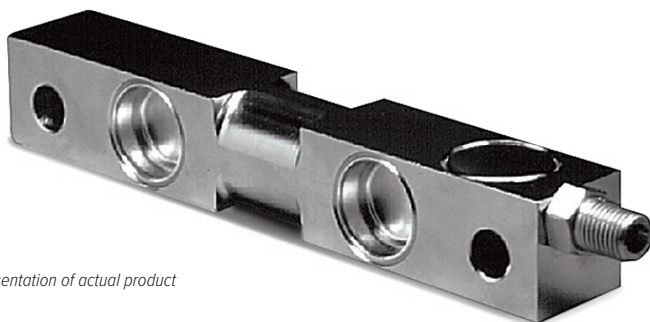


Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	36295	4 lb	Consult
1,500 lb	36296	4 lb	Consult
2,000 lb	36297	4 lb	Consult
2,500 lb	36298	4 lb	Consult
5,000 lb	36299	4 lb	Consult
10,000 lb	36300	7 lb	Consult
15,000 lb	36301	7 lb	Consult
20,000 lb	36302	7 lb	Consult
25,000 lb	36303	7 lb	Consult
50,000 lb	36304	27 lb	Consult
75,000 lb*	36305	27 lb	Consult



*75,000lb capacity has a square center

Dimensions


Rated Capacity	E	G	A1	A2	B	C	CONDUIT ADAPTER	F
lb/in								
1,000 to 5,000	0.50	1.25	1.25	1.25	7.50	6.25	1/4-18 NPT	1.12
10,000 to 25,000	0.81	1.99	1.44	1.94	8.75	7.50	1/4-18 NPT	1.62
50,000	1.31	3.00	2.44	2.94	13.50	11.50	1/2-14 NPT	3.75
75,000	1.31	—	2.44	2.94	13.50	11.50	1/2-14 NPT	3.75

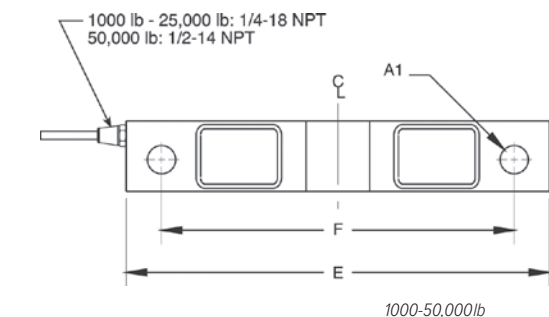

1000-50,000lb

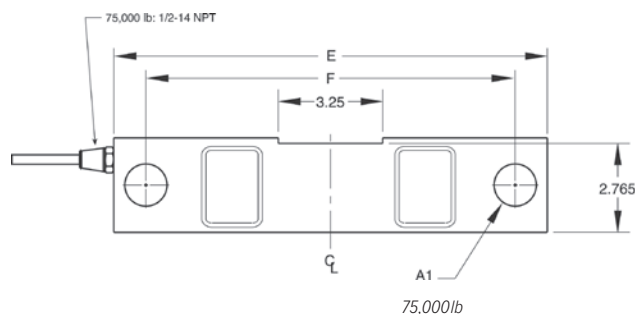

75,000lb



Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL75016WHE.....page 135

VPG® SENSORTRONICS

65016WH.....page 292

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1600 Series...page 67 and page 69

Specifications

Full Scale Output:

3.0 mV/V nominal

Output Resistance:

699 to 707 ohm

Input Resistance:

686 to 714 ohm

Material/Finish:

Stainless steel

Temperature:

Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 V DC (15 V maximum)

Nonlinearity:

0.03% full scale

Hysteresis:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

25 ft

Cable Diameter:

1,000 to 25,000 lb: 0.200 in
50,000 to 75,000 lb: 0.305 in
Polyurethane jacket

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Warranty:

One-year limited

Approvals:

cFMus