

SINGLE POINT

LOC Heavy Capacity

Aluminum, Environmentally Sealed, NTEP Certified 1:5,000 Class III Single Cell, IP65



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
100 kg	39797	7 lb	Consult
150 kg	39796	7 lb	Consult
250 kg	39795	7 lb	Consult
300 kg	39794	7 lb	Consult
500 kg	39793	7 lb	Consult

Dimensions

Rated Capacity	A	C	D	E	F	G	H
kg/mm							
100 to 500	191.0	25.0	11.0	82.0	60.0	5/16-18 UNC x 20 DP	75.0

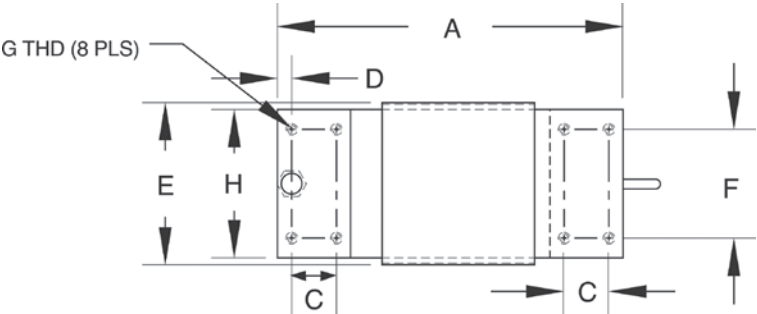

Specifications

- Full Scale Output:** 2.0 mV/V
- Output Resistance:** 350 (± 3) ohm
- Input Resistance:** 410 (± 10) ohm
- Material/Finish:** Aluminum
- Temperature:** Compensated range 14 °F to 104 °F (-10 °C to 40 °C) Operating range 0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:** Environmentally sealed, IP65
- Safe Overload:** 150% full scale
- Rated Excitation:** 5 to 10 VDC (15 V maximum)
- Combined Error:** 0.025% full scale
- Non-Repeatability:** 0.02%
- Insulation Resistance:** 5,000 megohm
- Cable Length:** 3 m
- Cable Diameter:** 0.200 in PVC jacket
- Cable Color Code:** Red +Excitation Black -Excitation Green +Signal White -Signal
- Max Platform Size:** 24 x 24 in
- Warranty:** One-year limited
- Approvals:** cFMus NTEP