



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
3 kg	41822	1 lb	Consult
6 kg	41823	1 lb	Consult
10 kg	41824	1 lb	Consult
15 kg	41825	1 lb	Consult
20 kg	41826	1 lb	Consult
Non-NTEP Certified			
10 kg	30145	1 lb	Consult
15 kg	30146	1 lb	Consult
20 kg	30147	1 lb	Consult
30 kg	46502	1 lb	Consult
35 kg	30148	1 lb	Consult
60 kg	41149	2 lb	Consult
100 kg	41150	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	H	I	T
kg/mm									
3	15.0	7.0	58.0	6.0	12.0	70.0	6.0	22.0	M3 × 0.5
6 to 20	30.0	15.0	106.0	12.0	25.0	130.0	12.0	22.0	M6 × 1.0
30 to 35	40.0	15.0	106.0	12.0	25.0	130.0	12.0	22.0	M6 × 1.0
60 to 100	35.0	15.0	117.0	-	-	150.0	-	40.0	M6 × 1.0

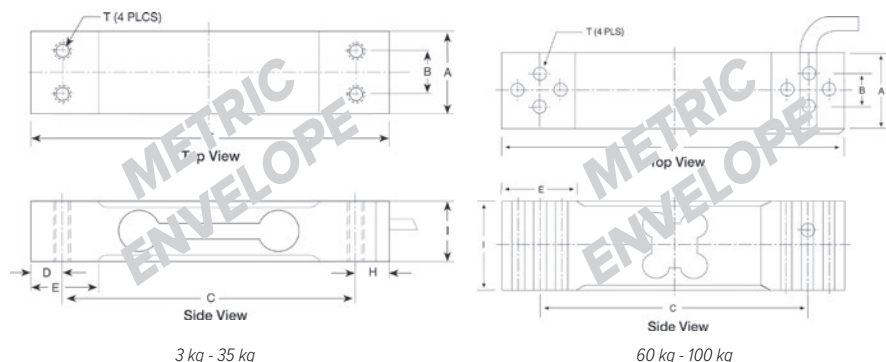

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL1521A.....page 156

VP® TEDEA-HUNTLEIGH

1022.....page 310

VP® BLH

C2G1

NMB®

C2G1

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

410 (± 15) ohm

Material/Finish:

Aluminum

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP65

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.25% full scale

Non-Repeatability:

0.02%

Insulation Resistance:

5,000 megohm

Cable Length:

3 to 35 kg: 16.5 in

60 kg: 14 in

100 kg: 6.5 ft

Cable Diameter:

0.14 in PVC jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Max Platform Size:

13.75 × 13.75 in

Warranty:

One-year limited

Approvals:

cFMus

NTEP