



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
500 kg	69315	3 lb	Consult
1 t	69316	3 lb	Consult
1.5 t	69317	3 lb	Consult
2 t	69318	3 lb	Consult
2.5 t	69319	3 lb	Consult

Dimensions

Rated Capacity	L	L1	L2	L3	W	W1	H	D	T
kg-t/in									
500 to 2.5	5.12	1.00	3.00	0.50	1.50	1.25	1.25	0.53	M12 x 1.75

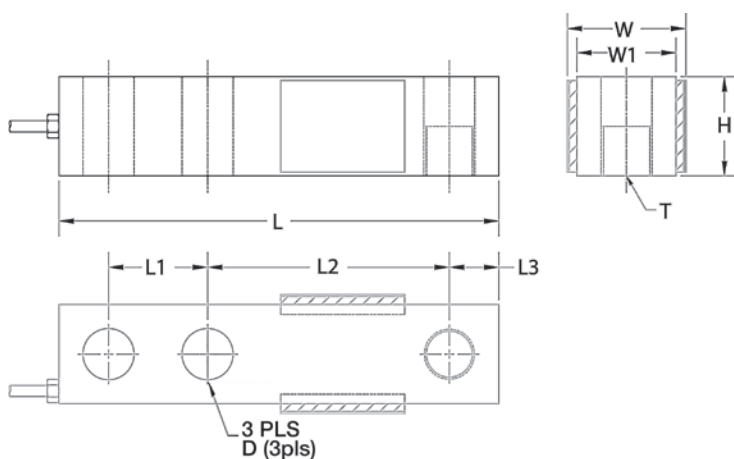

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

385 (± 5) ohm

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VAC/DC (15 V maximum)

Combined Error:

0.025%

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Diameter:

0.200 in

Polyurethane jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

One-year limited

Approvals:

cFMus

OIML