




Picture is a representation of actual product

### Order Information

| Load Rating | Part #       | Est. Weight | Price   |
|-------------|--------------|-------------|---------|
| 500 lb      | <b>69326</b> | 2 lb        | Consult |
| 750 lb      | <b>69327</b> | 2 lb        | Consult |
| 1,000 lb    | <b>69328</b> | 2 lb        | Consult |
| 1,500 lb    | <b>69329</b> | 2 lb        | Consult |
| 2,000 lb    | <b>69330</b> | 2 lb        | Consult |
| 2,500 lb    | <b>69331</b> | 2 lb        | Consult |
| 3,000 lb    | <b>69332</b> | 2 lb        | Consult |
| 5,000 lb    | <b>69333</b> | 4 lb        | Consult |
| 10,000 lb   | <b>69334</b> | 4 lb        | Consult |

### Dimensions

| Rated Capacity  | A          | B    | D    | E    |
|-----------------|------------|------|------|------|
| lb/in           |            |      |      |      |
| 500 to 3,000    | 1/2-20 UNF | 1.00 | 2.00 | 2.97 |
| 5,000 to 10,000 | 3/4-16 UNF | 1.00 | 3.00 | 4.25 |

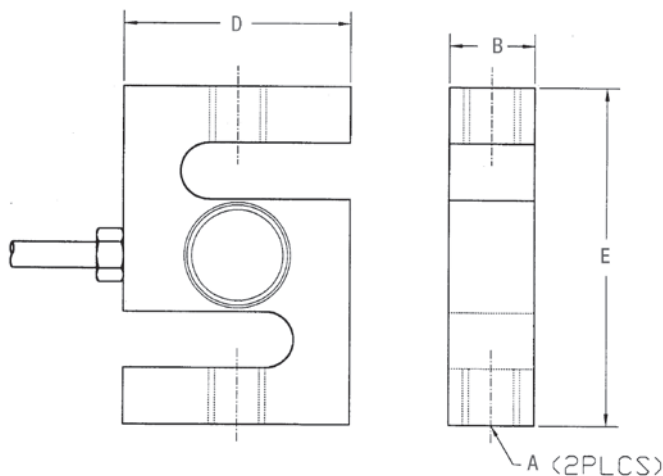

### Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

**ITCM-Isolated Tension Cell Mount**..... page 28

### Specifications

#### Full Scale Output:

2.0 mV/V

#### Output Resistance:

350 (± 3) ohm

#### Input Resistance:

385 (± 5) ohm

#### Material/Finish:

Stainless steel

#### Temperature:

Operating range  
0 °F to 150 °F (-18 °C to 65 °C)

#### Seal Type:

Welded-seal, IP67

#### Safe Overload:

150% full scale

#### Rated Excitation:

5 to 10 VDC (15 V maximum)

#### Combined Error:

0.05%

#### Insulation Resistance:

5,000 megohms

#### Cable Length:

20 ft

#### Cable Diameter:

0.200 in  
Polyurethane jacket

#### Cable Color Code:

Red +Excitation  
Black -Excitation  
Green +Signal  
White -Signal

#### Warranty:

One-year limited