




Picture is a representation of actual product

Order Information

Load Rating	Part #	Est. Weight	Price
20,000 kg	169233	10 lb	Consult
30,000 kg	169234	10 lb	Consult
50,000 kg	169235	13 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	O	R1	R2
kg/mm									
20,000	138.3	112.3	72.3	50.0	32.3	69.0	88.0	15.0	150.0
30,000	138.3	112.3	72.3	50.0	32.3	69.0	88.0	15.0	150.0
50,000	155.5	115.8	74.0	50.0	32.3	69.0	88.0	35.0	300.0

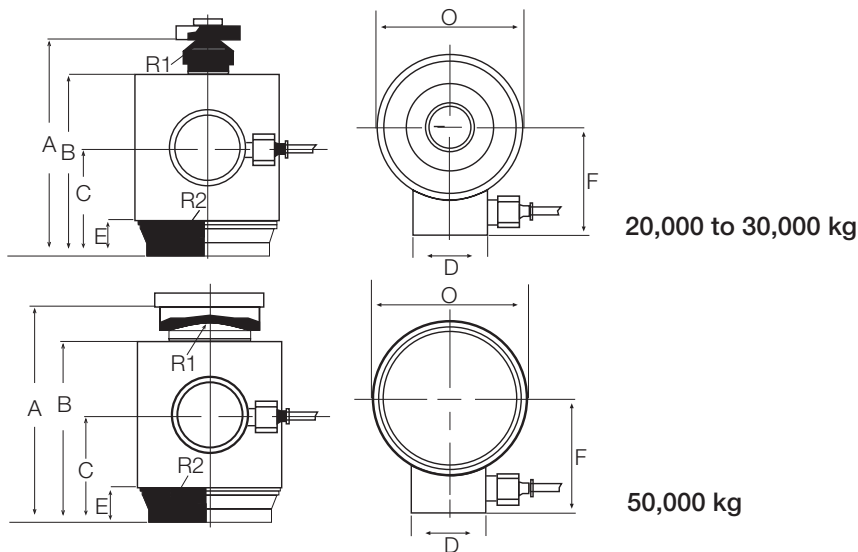

Load cups not included

Specifications

Full Scale Output:

1.5 mV/V

Output Resistance:

605 (± 5) ohm

Input Resistance:

670 (± 15) ohm

Material/Finish:

Stainless steel

Temperature:
Operating range
-0 °F to 150 °F (-18 °C to 65 °C)
Seal Type:

Environmentally sealed, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC

Combined Error:

0.02% of applied load

Insulation Resistance:

2,000 megohm

Cable Length:

15 m

Cable Color Code:
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense
Warranty:

One-year limited