



Picture is a representation of actual product

### Approvals



Available  
upon  
request

### Order Information




| Load Rating            | Part #       | Est. Weight | Price   |
|------------------------|--------------|-------------|---------|
| <b>Stainless Steel</b> |              |             |         |
| 2 kg*                  | <b>17567</b> | 8 lb        | Consult |
| 5 kg                   | <b>17568</b> | 8 lb        | Consult |
| 7 kg                   | <b>17569</b> | 8 lb        | Consult |
| 10 kg                  | <b>17570</b> | 8 lb        | Consult |
| 15 kg                  | <b>17571</b> | 8 lb        | Consult |
| 20 kg                  | <b>17572</b> | 8 lb        | Consult |
| 30 kg                  | <b>17573</b> | 8 lb        | Consult |
| 50 kg                  | <b>17574</b> | 8 lb        | Consult |
| <b>Alloy Steel</b>     |              |             |         |
| 2 kg*                  | <b>17559</b> | 8 lb        | Consult |
| 5 kg                   | <b>17560</b> | 8 lb        | Consult |
| 7 kg                   | <b>17561</b> | 8 lb        | Consult |
| 10 kg                  | <b>17562</b> | 8 lb        | Consult |
| 15 kg                  | <b>17563</b> | 8 lb        | Consult |
| 20 kg                  | <b>17564</b> | 8 lb        | Consult |
| 30 kg                  | <b>17565</b> | 8 lb        | Consult |
| 50 kg                  | <b>17566</b> | 8 lb        | Consult |

\*Non-NTEP Certified

Note: The special fluid damped operation is particularly well-suited for applications where quick weighment is required, e.g., checkweighers

### Dimensions

| Rated Capacity | D      | H     | H1   | H2  | L     | L1    | L3   | T                  | W    | W1   | W2   |
|----------------|--------|-------|------|-----|-------|-------|------|--------------------|------|------|------|
| kg/mm          |        |       |      |     |       |       |      |                    |      |      |      |
| 2 to 50        | 50 dia | 115.0 | 21.0 | 2.0 | 220.0 | 200.0 | 58.5 | 1/4-20 UNC x 10 DP | 80.0 | 40.0 | 25.0 |

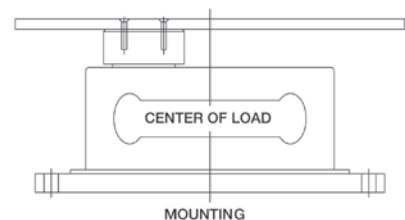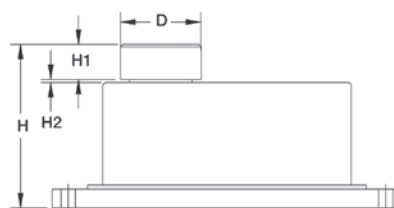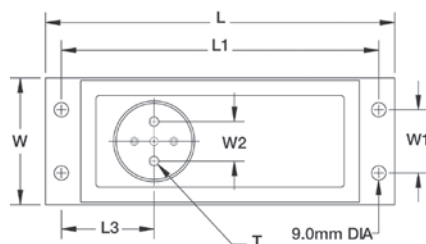

### Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

**RL260FD\*** ..... page 167

\*3000d NTEP, 16.4 ft cable

### Specifications

#### Full Scale Output:

2.0 mV/V

#### Output Resistance:

350 (± 3) ohm

#### Input Resistance:

415 (± 15) ohm

#### Material/Finish:

Anodized aluminum in alloy steel or stainless steel

#### Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

#### Seal Type:

Environmentally sealed, IP66

#### Safe Overload:

150% at center loading point, full scale

#### Rated Excitation:

5 to 10 VDC (15 V maximum)

#### Combined Error:

0.025% full scale

#### Insulation Resistance:

2,000 megohm

#### Cable Length:

10 ft

#### Cable Diameter:

0.370 in PVC jacket

#### Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

#### Warranty:

One-year limited

#### Approvals:

NTEP

OIML (Available upon request)