



Picture is a representation of actual product

Approvals



Available
upon
request


Available
upon
request

Order Information

Load Rating	Part #	Est. Weight	Price
5 kg	30165	2 lb	Consult
10 kg	30166	2 lb	Consult
20 kg	30167	2 lb	Consult
50 kg	30168	2 lb	Consult
100 kg	30169	2 lb	Consult
200 kg	30170	2 lb	Consult
500 kg	36463	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	J	K	M	N
kg/mm												
5 to 500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.2

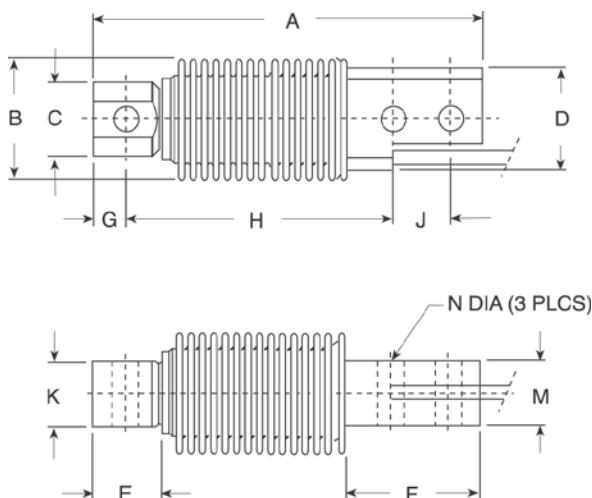

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL9018SS page 107

RICE LAKE WEIGHING SYSTEMS

RLHBB

VP® REVERE

SHB page 253

HBM®

Z6 page 226

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1700 HE page 23

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

355 (± 5) ohm

Input Resistance:

380 (± 10) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

2,000 megohm

Deflection at Capacity:

0.015 in

Cable Length:

10 ft

Cable Diameter:

0.220 in

Polyurethane jacket

Cable Color Code:

Blue +Excitation

Black -Excitation

White +Signal

Red -Signal

Green +Sense

Grey -Sense

Warranty:

One-year limited

Approvals:

cFMus

NTEP

Ex (Available upon request)

OIML (Available upon request)