


SINGLE-ENDED BEAM
3510-NTEP

Stainless Steel, Welded Seal, NTEP Certified 1:3,000 Single Cell, 1:5,000 Multiple Cell Class III, IP68



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	36458	3 lb	Consult
1,500 lb	36459	3 lb	Consult
2,500 lb	36460	3 lb	Consult
4,000 lb	36461	3 lb	Consult

Dimensions

Rated Capacity	C	C1	H	H1	L	L1	L2	L3	L4	L5	T	W
lb/in												
1,000 to 4,000	0.53	0.53	1.26	0.63	5.12	0.62	1.00	3.00	1.97	0.91	1/2-14 UNF	1.26

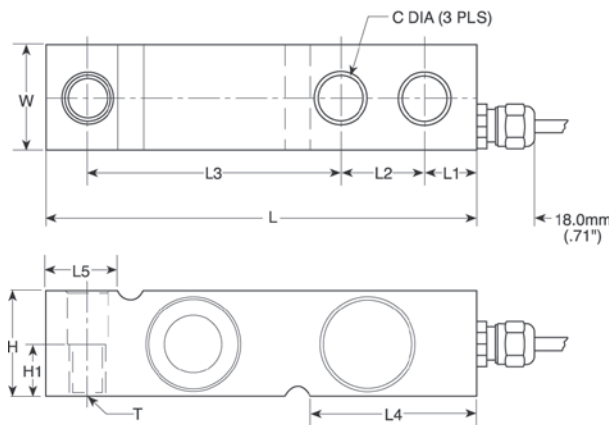

Interchangeable Products

VPG® SENSORTRONICS

65083..... page 284

VPG® CELTRON

SQB-HSS..... page 192

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1700 HE..... page 23

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

415 (± 15) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

1,000 megohm

Deflection at Capacity:

0.015 in

Cable Length:

5 m

Cable Diameter:

0.220 in

Polyurethane jacket

Cable Color Code:

Blue +Excitation

Black -Excitation

White +Signal

Red -Signal

Green +Sense

Gray -Sense

Warranty:

One-year limited

Approvals:

cFMus

NTEP