

Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
50,000 lb	69489	17 lb	Consult
65,000 lb	69490	17 lb	Consult
100,000 lb	124390	17 lb	Consult

Dimensions

Rated Capacity	A	D	F	G	H	J	K	L	P
lb/in									
50,000 to 100,000	10.25	1.00	1.94	2.40	4.25	8.50	1.00	2.06	2.94

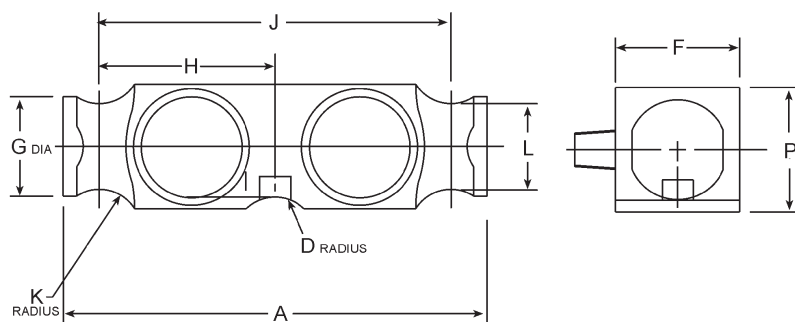

Interchangeable Products

NV TECHNOLOGY®

BLC-2-XX-N

THURMAN®

10088970A-50K

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

700 (± 3.5) ohm

Input Resistance:

700 (± 3.5) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Non-repeatability:

0.01% full scale

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

30 ft

Cable Diameter:

0.295 in

Polyurethane jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

One-year limited

Approvals:

cFMus

NTEP