



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
10,000 lb	17588	8 lb	Consult
25,000 lb	17589	8 lb	Consult
50,000 lb	17590	8 lb	Consult
100,000 lb	17591	16 lb	Consult
200,000 lb	17592	40 lb	Consult
300,000 lb	17593	40 lb	Consult
500,000 lb	17594	53 lb	Consult

Dimensions

Rated Capacity	A	B	D	E	F	G	H	DEPTH of H
lb/in								
10,000 to 50,000	2.48	3.25	6.00	3.30	0.40	1.25	1/2-20 UNF	0.31
100,000	4.12	5.00	6.00	3.50	0.51	2.31	3/4-16 UNF	0.56
200,000 to 300,000	6.00	7.25	17.00	4.60	1.04	3.13	3/4-16 UNF	0.75
500,000	6.50	9.00	17.00	4.80	0.56	3.69	3/4-16 UNF	0.75

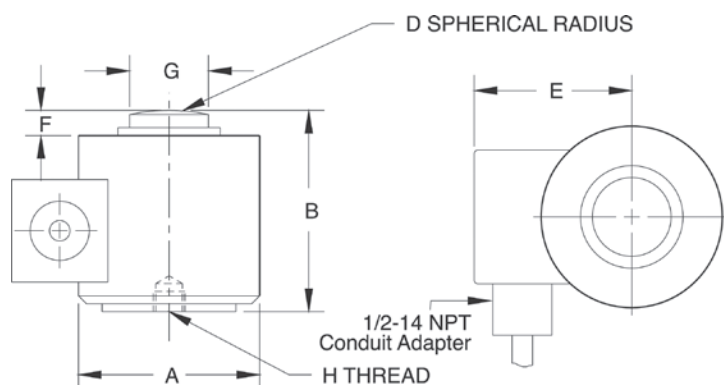

Interchangeable Products

VPG® REVERE

392B

ARTECH®

90210

CARDINAL®

CP1

HOWE RICHARDSON®

20908XXX

STREETER AMET®

3753070, 3752030, 3752040,
3751940

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

MagnaMount® page 77

Specifications

Full Scale Output:

1.75 mV/V

Output Resistance:

480 (± 4.8) ohm

Input Resistance:

450 (± 4.5) ohm

Material/Finish:

Stainless steel

Temperature:

Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.15% full scale

Non-repeatability:

0.03% full scale

Insulation Resistance:

5,000 megohm

Deflection at Capacity:

10,000 to 50,000 lb: 0.003 in
100,000 to 300,000 lb: 0.006 in
500,000 lb: 0.009 in

Cable Length:

30 ft

Cable Diameter:

0.295 in
Polyurethane jacket

Cable Color Code:

Green +Excitation
Black -Excitation
White +Signal
Red -Signal

Warranty:

One-year limited

Approvals:

cFMus