



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
6 kg	22335	2 lb	Consult
6 kg	116475	2 lb	Consult
25 lb	17406	2 lb	Consult
50 lb	17407	2 lb	Consult
100 lb	17408	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F1	F2
kg/mm							
6	127.0	50.2	18.5	—	63.5	—	107.9
25 to 50	127.0	50.2	18.5	6.3	—	19.0	76.2
100	127.0	46.2	23.8	6.3	—	19.0	76.2

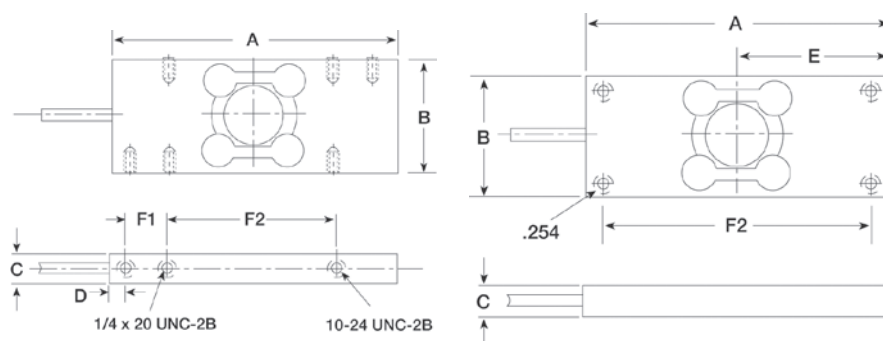

HPS 6 kg - 100 lbs
(PN 22335, 17406, 17407, 17408)

HPS (6 KGS)
(PN 116475)

Specifications

Full Scale Output:

25 to 100 lb: 3.0 mV/V
6 kg: 2.0 mV/V

Output Resistance:

350 (± 7) ohm

Input Resistance:

400 (± 6) ohm

Material/Finish:

Stainless steel

Temperature:

Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VAC (15 V maximum)

Combined Error:

0.03% full scale

Non-repeatability:

0.01% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

10 ft

Cable Color Code:

Green +Excitation
Black -Excitation
White +Signal
Red -Signal

Warranty:

One-year limited

Approvals:

cFMus