



Picture is a representation of actual product

Approvals



Order Information: NTEP Certified

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
0.5 T	36190	2 lb	Consult
1 T	36191	2 lb	Consult
2 T	36192	3 lb	Consult
3.5 T	36193	3 lb	Consult
5 T	36194	3 lb	Consult
10 T	177263	6 lb	Consult
OIML			
0.25 T	126714	2 lb	Consult
0.5 T	126715	2 lb	Consult
1 T	126716	2 lb	Consult
2 T	126717	3 lb	Consult
3.5 T	126718	3 lb	Consult
5 T	126719	3 lb	Consult
10 T	177262	3 lb	Consult


Replacement Rocker Pin Set*

Load Rating (Per Module)	Part #	Price
250 kg to 1 T	170875	Consult
2 T to 5 T	170876	Consult
10 T	170877	Consult

*Kit includes upper cup, rocker pin and grease

Dimensions

Rated Capacity	D	D1	D2	D3	H	H1	H2	H3	T
T/in									
0.25 to 1	2.76	3.15	3.84	0.40	0.99	0.60	0.04	0.37	M6 (3 x 120°)
2 to 5	2.76	3.15	3.84	0.60	1.18	0.79	0.24	0.33	M6 (3 x 120°)
10	3.26	3.74	4.42	0.98	1.37	0.58	-	0.39	M6 (3 x 120°)

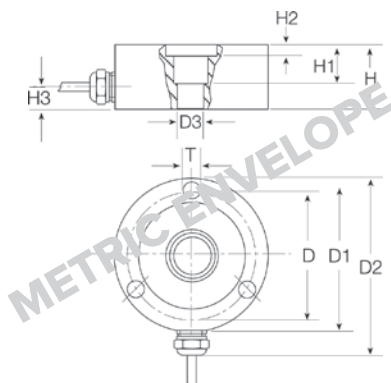

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RLC..... page 53

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

1,025 (± 25) ohm

Input Resistance:

1,110 (± 50) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Hermetically sealed, IP66/68

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

5 m

Cable Color Code:

Pink +Excitation

Grey -Excitation

Brown +Signal

White -Signal

Warranty:

One-year limited

Approvals:

FM

OIML

NTEP