



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
500 lb	46469	2 lb	Consult
750 lb	46470	2 lb	Consult
1,000 lb	46471	2 lb	Consult
1,500 lb	46472	2 lb	Consult
2,000 lb	46473	2 lb	Consult
2,500 lb	46474	2 lb	Consult
3,000 lb	46475	2 lb	Consult
5,000 lb	46476	5 lb	Consult
Non-NTEP Certified			
10,000 lb	36292	5 lb	Consult

Dimensions

Rated Capacity	A	B	D	E
lb/in				
500 to 3,000	1/2-20 UNF	1.00	2.00	3.00
5,000 to 10,000	3/4-16 UNF	1.00	3.50	4.75

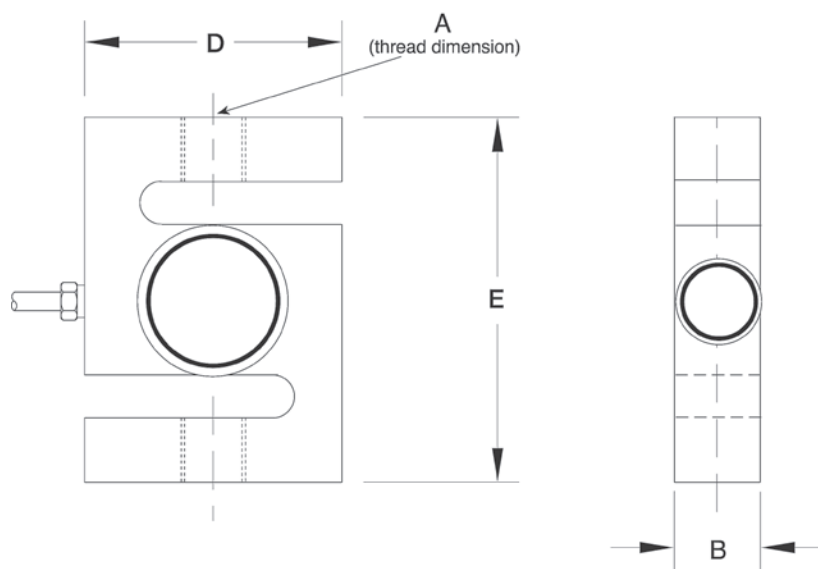

Interchangeable Products

VPG® SENSORTRONICS®

60063 page 277

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

**ITCM HE Isolated
Tension Cell Mount**..... page 30

Specifications

Full Scale Output:

2.0 mV/V

Bridge Resistance:

350 ohm, nominal

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Diameter:

0.200 in polyurethane jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

Two-year limited

Approvals:

cFMus

NTEP 98-071