



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
35 ft Cable			
25,000 lb	32702	7 lb	Consult
50,000 lb	32701	7 lb	Consult
100,000 lb	32700	15 lb	Consult
200,000 lb	32699	28 lb	Consult
80 ft Cable			
200,000 lb	197788	30 lb	Consult

Dimensions

Rated Capacity	A	B	D	F	G	H	L-DEPTH
lb/in							
25,000 to 50,000	3.00	3.25	6.00	0.40	1.25	1/2-20 UNF	0.31
100,000	4.00	5.00	6.00	0.51	2.31	3/4-16 UNF	0.56
200,000	6.00	7.25	17.00	1.04	3.13	3/4-16 UNF	0.75

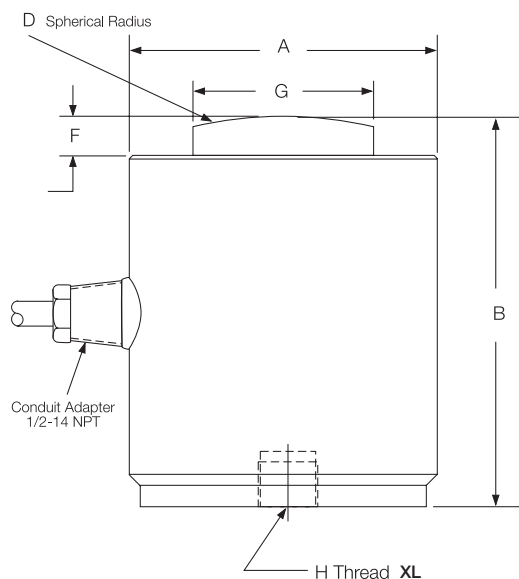

Interchangeable Products

VPG® REVERE

CSP page 265

VPG® SENSORTRONICS®

65088-1000

VPG® REVERE

692B

HOWE RICHARDSON®

244699-000X

STREETER AMET®

3760XXX

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

MagnaMount page 77

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

475.2 to 484.8 ohm

Input Resistance:

445.5 to 454.5 ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.03% full scale

Non-repeatability:

0.01% full scale

Insulation Resistance:

1,000 megohm

Deflection at Capacity:

25,000 to 50,000 lb: 0.003 in

100,000 to 125,000 lb: 0.006 in

Cable Length:

35 ft

80 ft

Cable Diameter:

0.305 in polyurethane jacket

Cable Color Code:

Green +Excitation

Black -Excitation

White +Signal

Red -Signal

Orange Shield

Warranty:

Two-year limited

Approvals:

NTEP 95-140