



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	34310	5 lb	Consult
2,000 lb	34311	5 lb	Consult
5,000 lb	34312	6 lb	Consult
10,000 lb	34313	10 lb	Consult
Options			
Load cell button (1 K to 5 K)	26112	—	Consult

Dimensions

Rated Capacity	C	C1		H	L	L1	L2	L3	L4	W
lb/in										
1,000 to 5,000	0.53	0.68 thru C'Bore 1.19 x 0.47 DP		1.88	8.00	4.00	0.75	2.50	3.88	1.44
10,000	0.88	1.00 thru C'Bore 1.63 x 0.62 DP		2.75	9.25	4.62	0.81	2.63	4.88	1.88

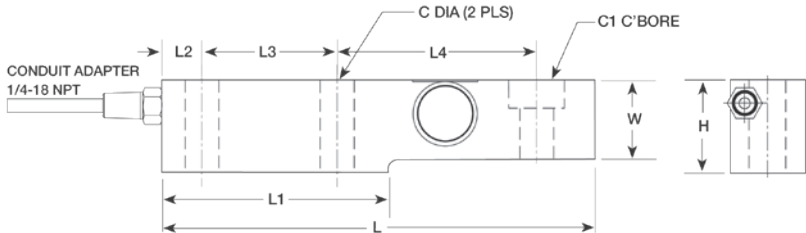

Interchangeable Products

VPG® REVERE
SSB..... page 254
HBK®
SB3
ARTECH®
SS30610

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
RL1900 Series..... page 45

Specifications

- Full Scale Output:**
2.0 mV/V
- Bridge Resistance:**
350 ohm, nominal
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Welded-seal, IP67
- Safe Overload:**
150% full scale
- Safe Sideload:**
100% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Non-repeatability:**
0.01% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
15 ft
- Cable Diameter:**
0.200 in polyurethane jacket
- Cable Color Code:**
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
- Warranty:**
Two-year limited
- Approvals:**
cFMus
NTEP 96-053