


## MODELO 260

### 5kg ... 200kg

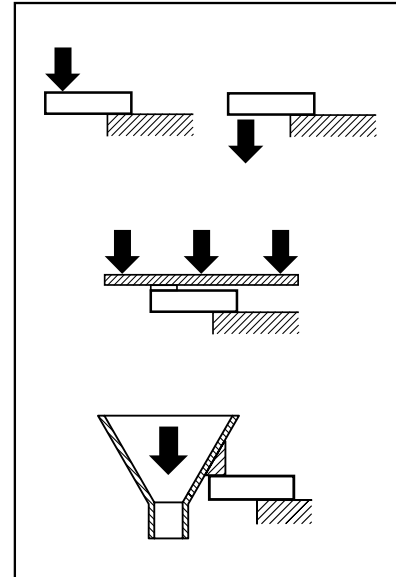

- Célula de carga de flexión
- 3000 divisiones OIML R60 clase C
- Amortiguador viscoso especial para pesaje dinámico:
  - Rápida estabilidad
  - Alta velocidad de pesada
  - Alarga la vida de la célula de carga
- Exterior en acero inoxidable
- Protección total contra la humedad IP 68 (EN 60529)
- Admite cargas descentradas en plataformas de 500 x 500 mm (5...35 kg) y 600 x 600 mm (50...200 kg)

**Protección integrada de sobrecargas centradas, con doble tope, hacia arriba y hacia abajo**

- Double bending beam load cell
- 3000 divisions OIML R60 class C
- Viscous damping specially for use in dynamic weighing applications:
  - Faster settling time
  - Higher weighing speeds
  - Increase load cell life
- Stainless-Steel housing
- Protected against humidity IP 68 (EN 60529)
- Single point load cell, for off-center loads on platforms up to 500 x 500 mm (5...35 kg) and 600 x 600 mm (50...200 kg)
- Integrated on-center overload protection, with a dual stopper for up and down loads

| Modelo<br>Model | Carga nominal<br>Nominal capacity<br>Ln | Clase de precisión<br>Accuracy class<br>n. OIML | División mínima<br>Minimum division<br>vmin | Carga de servicio<br>Service load<br>120 % Ln | Plataforma<br>Platform<br>A x B mm | Precisión<br>Accuracy<br>1/3 Ln |
|-----------------|-----------------------------------------|-------------------------------------------------|---------------------------------------------|-----------------------------------------------|------------------------------------|---------------------------------|
| 260 5 kg        | 5 kg                                    | 3000                                            | 0.5 g                                       | 6 kg                                          | 500 x 500                          | 3000 v                          |
| 260 7.5 kg      | 7.5 kg                                  | 3000                                            | 0.75 g                                      | 9 kg                                          | 500 x 500                          | 3000 v                          |
| 260 10 kg       | 10 kg                                   | 3000                                            | 1.0 g                                       | 12 kg                                         | 500 x 500                          | 3000 v                          |
| 260 15 kg       | 15 kg                                   | 3000                                            | 1.5 g                                       | 18 kg                                         | 500 x 500                          | 3000 v                          |
| 260 20 kg       | 20 kg                                   | 3000                                            | 2.0 g                                       | 24 kg                                         | 500 x 500                          | 3000 v                          |
| 260 35 kg       | 35 kg                                   | 3000                                            | 3.5 g                                       | 42 kg                                         | 500 x 500                          | 3000 v                          |
| 260 50 kg       | 50 kg                                   | 3000                                            | 5.0 g                                       | 60 kg                                         | 600 x 600                          | 3000 v                          |
| 260 75 kg       | 75 kg                                   | 3000                                            | 7.5 g                                       | 90 kg                                         | 600 x 600                          | 3000 v                          |
| 260 120 kg      | 120 kg                                  | 3000                                            | 12.0 g                                      | 144 kg                                        | 600 x 600                          | 3000 v                          |
| 260 200 kg      | 200 kg                                  | 3000                                            | 20.0 g                                      | 240 kg                                        | 600 x 600                          | 3000 v                          |

