

JB8SP

TuffSeal® Signal Trim Junction Box



Approvals



Part Number/Price

Part #	Description	Price
91782	JB8SP signal trim eight-channel with expansion	Consult
173807	JB8SP signal trim eight-channel with expansion, FM approved	Consult
89889	Board only	Consult
172415	Board only, FM approved	Consult
165273	Enclosure only (does not include cord grips and filter)	Consult




Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of system instability.

Options/Accessories

Part #	Description	Price
92734	Coupling, 1/2-inch NPT cord grip to 3/4-inch NPT conduit fitting	Consult
92735	Coupling, 3/8-inch NPT cord grip to 3/4-inch NPT conduit fitting	Consult

Dimensions

Enclosure			
A	12.13 in	E	9.32 in
B	11.45 in	F	5.98 in
C	11.38 in	G	6.95 in
D	10.59 in		

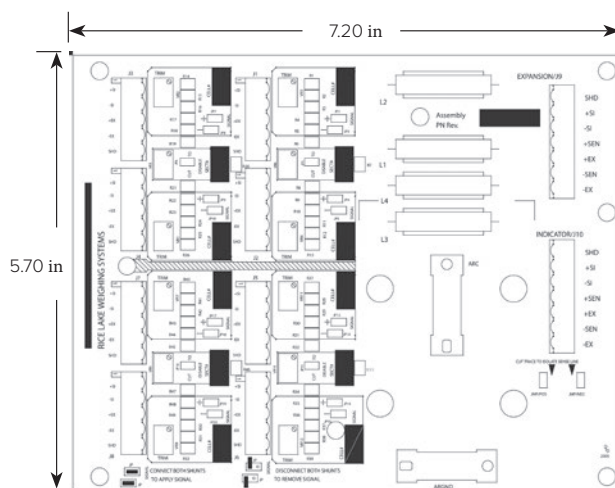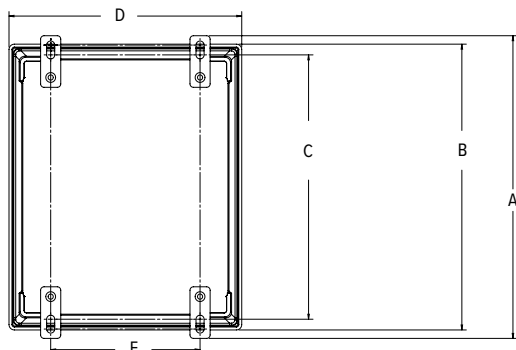

Standard Features

- Polycarbonate, NEMA Type 4X enclosure
- PreVent™ breather vent
- Conformal coated circuit board
- Removable load cell connectors
- Section and individual cell trim capability
- Number of cells: Two, four, six or eight single load cells (even number of cells only)
- Expansion port

Applications

- Truck, livestock and railroad scales

Specifications

Cable Fittings:

- (9) 3/8 in NPT 0.157 to 0.314 in
- (2) 1/2 in NPT 0.272 to 0.472 in

Rating/Material:

- NEMA Type 4X
- Polycarbonate with overlapping solid cover, stainless steel screws

Connectors:

- Pluggable screw type, 12 to 28 AWG

Trimming:

- Individual cell trim, range

Potentiometers:

- 100,000 ohm, 25 turn cermet

Temperature Range:

- Operating: 0 °F to 122 °F (-18 °C to 50 °C)

Circuit Board:

- 5.7 × 7.2 in with conformal coating

Warranty:

- One-year limited