

CELDA DE CARGA

RICELAKE, RL 1521A, Aluminum, Environmentally Sealed, NTEP Certified 1:5,000 Cla



Picture is a representation of actual product.

Approvals




Order Information:

Load Rating	Part #	Est. Weight	Price
1.50 ft Cables			
3 kg	50620	1 lb	Consult
5 kg	50619	1 lb	Consult
7 kg	50621	1 lb	Consult
10 kg	50622	1 lb	Consult
15 kg	50623	1 lb	Consult
20 kg	50624	1 lb	Consult
30 kg	50625	1 lb	Consult
35 kg	50626	1 lb	Consult
10 ft Cables			
3 kg	132261	3 lb	Consult
5 kg	132262	3 lb	Consult
7 kg	132263	3 lb	Consult
10 kg	132264	3 lb	Consult
15 kg	132265	3 lb	Consult
20 kg	132266	3 lb	Consult
30 kg	132267	3 lb	Consult
35 kg	132268	3 lb	Consult

Dimension

Rated Capacity	A	B	C	D	E	F	G	H
kg/mm								
3 to 7	130.0	22.0	25.0	M6 × 1.0	25.4	15.0	106.0	12.0
10 to 30	130.0	22.0	25.0	M6 × 1.0	30.0	15.0	106.0	12.0
35	130.0	22.0	25.0	M6 × 1.0	40.0	15.0	106.0	12.0

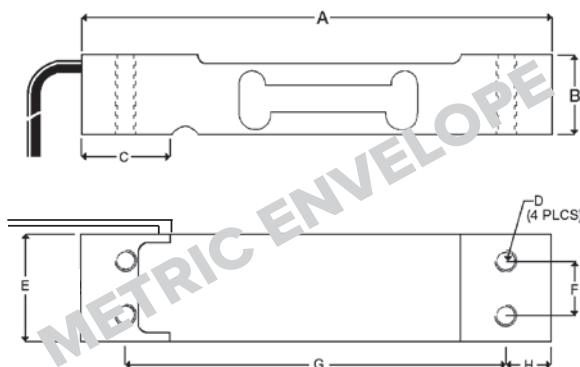

Interchangeable Products

VPG® CELTRON

LPS except 3 kg page 197

VPG® TEDEA-HUNTLEIGH

1022 page 310

VPG® BLH

C2G1

FAIRBANKS®

4900 Series
Checkweighers

NMB®

C2G1

ARTECH®

61022

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

410 (± 15) ohm

Material/Finish:

Aluminum

Temperature:

Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP66

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.03% full scale

Insulation Resistance:

2,000 megohm

Cable Length:

10 ft
1.50 ft

Cable Diameter:

0.14 in PVC jacket

Cable Color Code:

Green +Excitation
Black -Excitation
Red +Signal
White -Signal

Max Platform Size:

13.75 × 13.75 in

Warranty:

Two-year limited

Approvals:

cFMus
NTEP 98-166