

CELDA DE CARGA

RICELAKE, 1042, Aluminum, Environmentally Sealed, NTEP Certified 1:5,000 Class III



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1 kg	40955	1 lb	Consult
10 kg	40958	1 lb	Consult
15 kg	40959	1 lb	Consult
20 kg	40960	1 lb	Consult

Dimensions

Rated Capacity	A	H	L	L1	L2	L3	L4	L5	L6	W	W1	T
kg/mm												
1 to 20	20.0	39.0	150.0	19.0	100.0	25.0	34.0	19.0	34.0	40.0	1.0	1/4-20 UNC

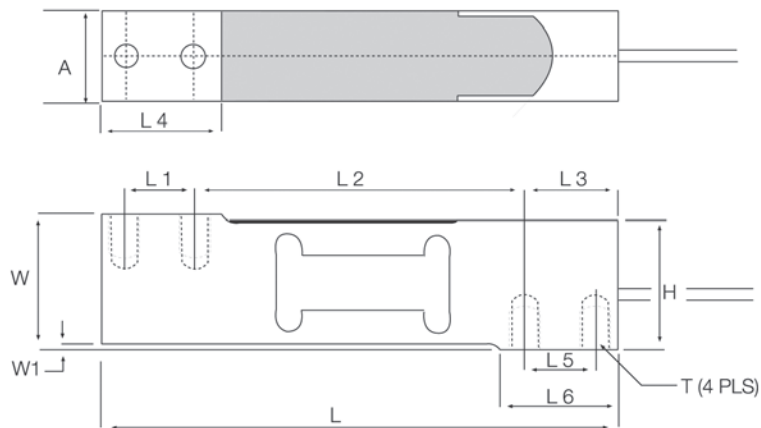

Interchangeable Products

RLSP4..... page 158

VP® TEDEA-HUNTLEIGH

1042..... page 313

HBK®

SP4M..... page 228

FLINTEC

PC 42

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

415 (± 15) ohm

Material/Finish:

Aluminum

Temperature:

Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP66

Safe Overload:

150% full scale
Over-center loading point

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Deflection at Capacity:

0.015 in

Insulation Resistance:

2,000 megohm

Cable Length:

10 ft

Cable Diameter:

0.200 in PVC jacket

Cable Color Code:

Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense

Platform Size:

16 × 16 in

Warranty:

Two-year limited

Approvals:

FM
NTEP 97-138