



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
100 lb	21463	2 lb	Consult
200 lb	21464	2 lb	Consult
300 lb	21465	2 lb	Consult
500 lb	21466	2 lb	Consult
750 lb	21467	2 lb	Consult
1,000 lb	21468	2 lb	Consult
1,500 lb	21469	2 lb	Consult
2,000 lb	21470	2 lb	Consult
3,000 lb	21471	4 lb	Consult
5,000 lb	21472	4 lb	Consult
10,000 lb	21473	4 lb	Consult
Non-NTEP Certified			
50 lb	17043	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E
lb/in					
50 to 300	1/4-28 UNF	0.65	0.50	2.00	2.50
500 to 1,500	1/2-20 UNF	0.90	0.75	2.00	2.50
2,000	1/2-20 UNF	1.15	1.00	2.00	2.50
3,000	1/2-20 UNF	1.15	1.00	3.00	4.00
5,000 to 10,000	3/4-16 UNF	1.15	1.00	3.00	4.00

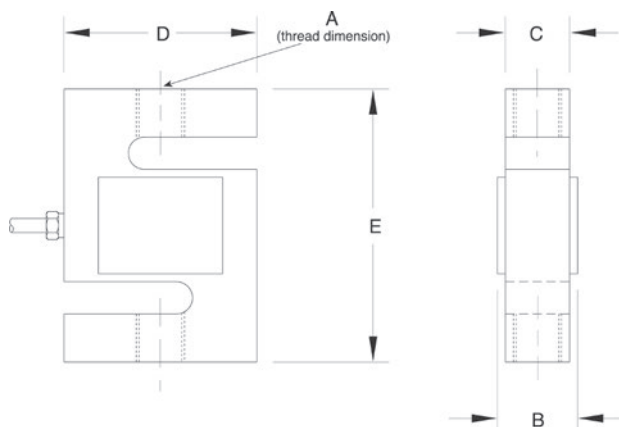

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL20000I..... page 92

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

ITCM Isolated Tension Cell Mount..... page 28

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

350 (± 3.5) ohm

Input Resistance:

390 (± 15) ohm

Material/Finish:

High alloy, nickel plated

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Non-repeatability:

0.01% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Color Code:

 Red +Excitation
 Black -Excitation
 Green +Signal
 White -Signal

Warranty:

One-year limited

Approvals:

cFMus

NTEP