



Picture is a representation of actual product.

### Approvals




### Order Information

| Load Rating               | Part #       | Est. Weight | Price   |
|---------------------------|--------------|-------------|---------|
| <b>NTEP Certified</b>     |              |             |         |
| 7 kg                      | <b>91725</b> | 2 lb        | Consult |
| 10 kg                     | <b>91726</b> | 2 lb        | Consult |
| 15 kg                     | <b>91727</b> | 2 lb        | Consult |
| 20 kg                     | <b>91728</b> | 2 lb        | Consult |
| 30 kg                     | <b>91729</b> | 2 lb        | Consult |
| 50 kg                     | <b>91730</b> | 2 lb        | Consult |
| 75 kg                     | <b>91731</b> | 2 lb        | Consult |
| 100 kg                    | <b>91732</b> | 2 lb        | Consult |
| <b>Non-NTEP Certified</b> |              |             |         |
| 5 kg                      | <b>91724</b> | 2 lb        | Consult |

### Dimensions

| Rated Capacity | A     | B    | C    | D    | E    | F    | G    | H    | I    |
|----------------|-------|------|------|------|------|------|------|------|------|
| kg/mm          |       |      |      |      |      |      |      |      |      |
| 5 to 100       | 150.3 | 25.4 | 39.9 | 19.1 | 19.1 | 19.1 | 33.8 | 99.6 | 11.4 |

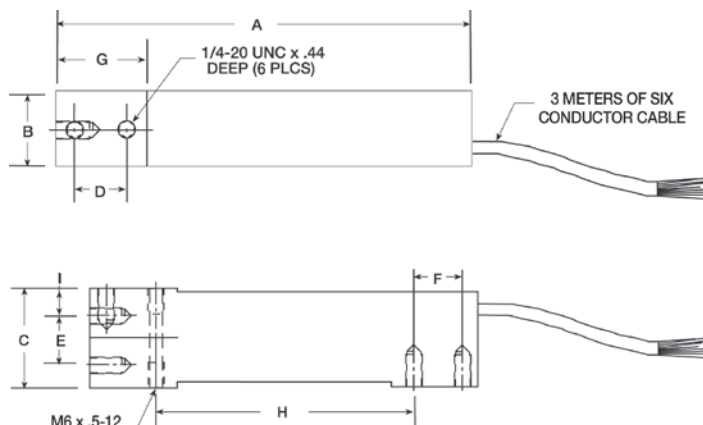

### Interchangeable Products

HBK®

**SP4M**..... page 228

### Specifications

#### Full Scale Output:

2.0 mV/V

#### Output Resistance:

350 (± 3) ohm

#### Input Resistance:

350 ohm

#### Material/Finish:

Anodized aluminum

#### Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

#### Seal Type:

Environmentally sealed, IP66

#### Safe Overload:

150% full scale

#### Rated Excitation:

5 to 10 VDC (15 V maximum)

#### Combined Error:

0.02% full scale

#### Insulation Resistance:

5,000 megohm

#### Deflection at Capacity:

0.4 mm

#### Cable Length:

10 ft

#### Cable Diameter:

0.19 in PVC jacket

#### Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

Yellow Shield

#### Max Platform Size:

5 to 10 kg: 12 × 12 in

15 to 30 kg: 18 × 18 in

50 to 100 kg: 24 × 24 in

#### Warranty:

Two-year limited

#### Approvals:

FM

NTEP 05-114